



Forma KEL - conica a testa raggiata Shape KEL - Taper radius end

1.
01

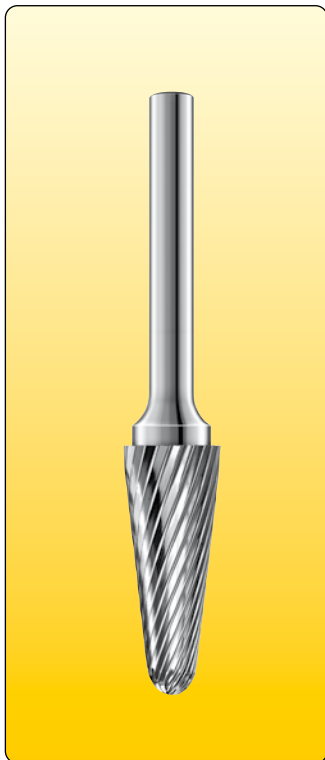

Disponibile su richiesta anche con rivestimento Cer-T
Cer-T coating upon request

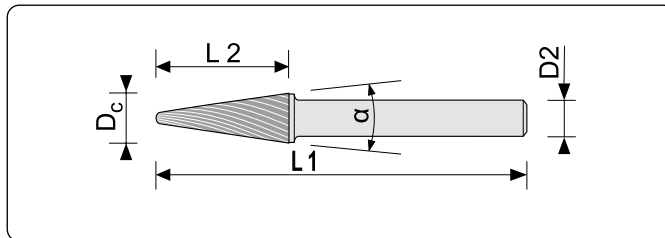

HM
CK 30 M
Medium

Sim. to
DIN
8033



D _c	L2	L1	D2	R	α	Tagliente tipo / Cut type						42	32
						1	2	3	4	5	6		
3	14	40	3,00	1	6°	-	●	●	●	●	●	4233/...	
4	14	49	3,00	1	10°	-	●	●	●	●	●	4243/...	
5	16	51	3,00	1,5	10°	-	●	●	●	●	●	4253/...	
6	20	55	3,00	1,5	10°	-	●	●	●	●	●	4263/...	
4	14	50	6,00	1	10°	●	●	●	●	●	●		320406/...
6	20	50	6,00	1,5	10°	●	●	●	●	●	●		320606/...
8	20	65	6,00	1,5	14°	●	●	●	●	●	●		320806/...
10	20	65	6,00	2,9	14°	●	●	●	●	●	●		321006/...
12	30	75	6,00	2,6	14°	●	●	●	●	●	●		321206/...
16	30	75	6,00	4,8	14°	●	●	●	●	●	●		321606/...
16	30	75	8,00	4,8	14°	●	●	●	●	●	●		321608/...
20	42	87	6,00	5,9	14°	●	●	●	●	●	●		322006/...
20	42	87	8,00	5,9	14°	●	●	●	●	●	●		322008/...

... Indicare sempre la tipologia del tagliente (per esempio: 2015/4)

... Please always indicate cut type (example: 2015/4)

