

Frese Z=2 elica 30° - norma interna

Linea "ULTRA Ra" con gole lappate

End mills - Z=2 Helix 30° - Internal standard

"ULTRA Ra" Speed Line with fine lapped chip flutes

Settore d'impiego / Range of application

A: Leghe leggere / Light alloys

A1.1-1.7 A2.1-2.7 A3.1-3.2 A4.1-4.2




B: Plastiche

B: Plastics

B1.1-1.3 B1.5-1.6 B2.1-2.4

E: Titanio / Titanium

E1.1

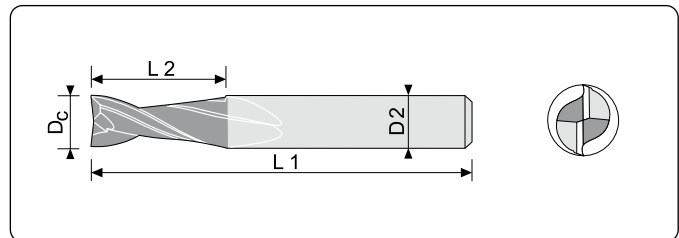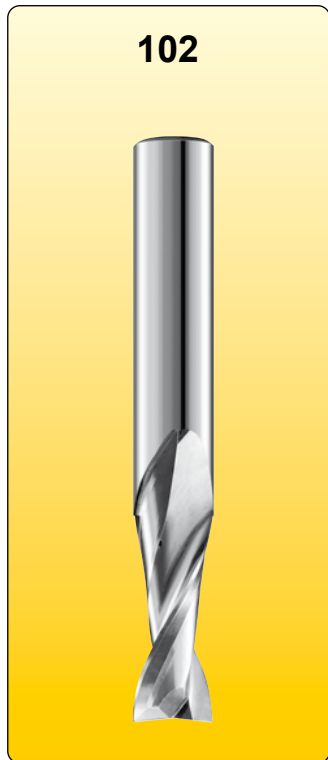

D _c h10	L2	L1	D2 h6	102	102G
					Rivestite / Coated
2	6	50	6	102.020060650	102.020060650G
2	8	50	3	102.020030850	102.020030850G
3	12	40	3	102.030031240	102.030031240G
3	7	50	6	102.030060750	102.030060750G
3	12	50	6	102.030061250	102.030061250G
4	14	40	4	102.040041440	102.040041440G
4	9	50	6	102.040060950	102.040060950G
4	14	50	6	102.040061450	102.040061450G
5	11	50	6	102.050061150	102.050061150G
5	16	50	5	102.050051650	102.050051650G
6	13	50	6	102.060061350	102.060061350G
6	18	50	6	102.060061850	102.060061850G
6	25	60	6	102.060062560	102.060062560G
6	35	75	6	102.060063575	102.060063575G
8	20	63	8	102.080082063	102.080082063G
8	30	75	8	102.080083075	102.080083075G
8	40	100	8	102.0800840100	102.0800840100G
10	25	72	10	102.100102572	102.100102572G
12	30	83	12	102.120123083	102.120123083G
16	35	92	16	102.160163592	102.160163592G
20	45	104	20	102.2002045104	102.2002045104G

2.
05