

Frese di copiatura a testa raggiata - Z=2 elica 40° - simile a DIN 6527-L

Linea "ULTRA Ra" con gole lappate

Ball nose copy cutters - Z=2 Helix 40° - Similar to DIN 6527-L

"ULTRA Ra" Speed Line with fine lapped chip flutes

Settori d'impiego / Range of application

A: Leghe leggere / Light alloys

A1.1-1.6 A2.1-2.6 A3.1-3.2 A4.1-4.2




B: Plastiche - Plastiche rinforzate con fibre

B: *Plastics - Reinforced plastic fibres*


(GFK - CFK - AFK) - B1.1-1.6 B2.1-2.4

E: Titanio / Titanium

E1.1-2.1

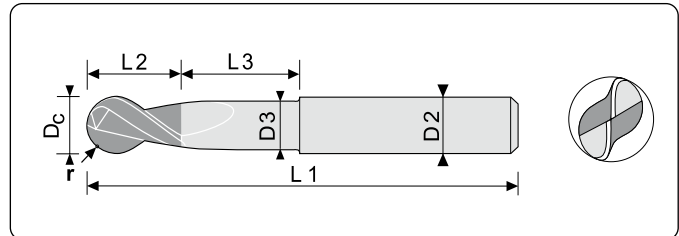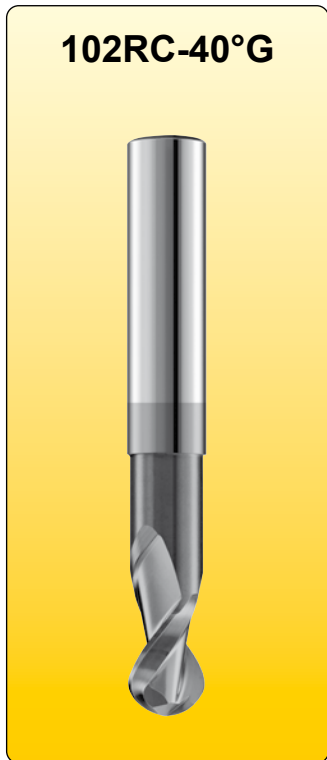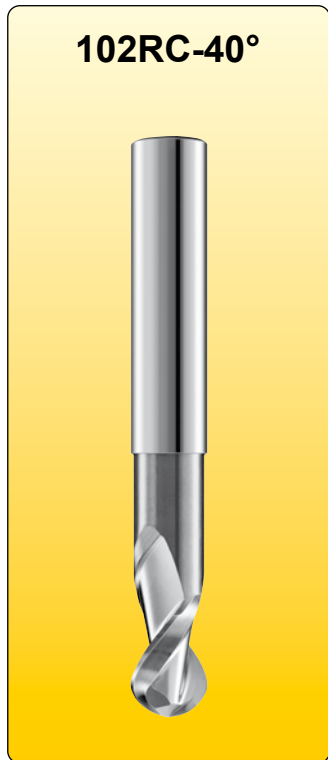

2.02



D _c h10	L2	L1	L3	D2 h6	D3	r	102RC-40°	102RC-40°G
								Rivestite / Coated
2	4	57	2	6	1,8	1,0	102RC.020-40°	102RC.020-40°G
3	5	57	4	6	2,8	1,5	102RC.030-40°	102RC.030-40°G
4	6	57	6	6	3,7	2	102RC.040-40°	102RC.040-40°G
5	7	57	8	6	4,6	2,5	102RC.050-40°	102RC.050-40°G
6	8	57	12	6	5,5	3	102RC.060-40°	102RC.060-40°G
8	10	63	16	8	7,4	4	102RC.080-40°	102RC.080-40°G
10	12	72	19	10	9,2	5	102RC.100-40°	102RC.100-40°G
12	14	83	23	12	11	6	102RC.120-40°	102RC.120-40°G
14	16	83	25	14	13	7	102RC.140-40°	102RC.140-40°G
16	18	92	25	16	15	8	102RC.160-40°	102RC.160-40°G
20	22	104	31	20	19	10	102RC.200-40°	102RC.200-40°G