


## Frese a candela Z=2 - elica 14° - simili a DIN 6527-L


Linea "ULTRA Ra" con gole lappate

## End mills Z=2 Helix 14° - Similar to DIN 6527-L

"ULTRA Ra" Speed Line with fine lapped chip flutes

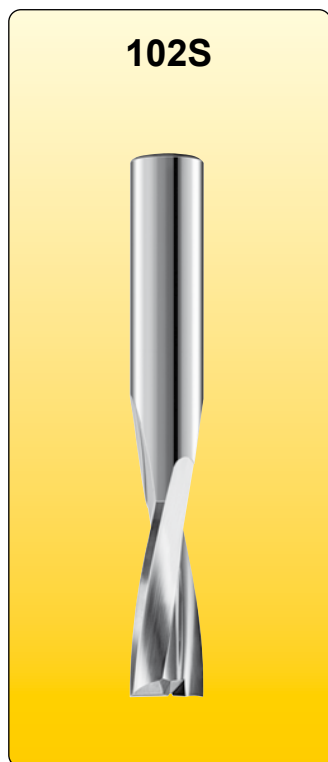

**102S**

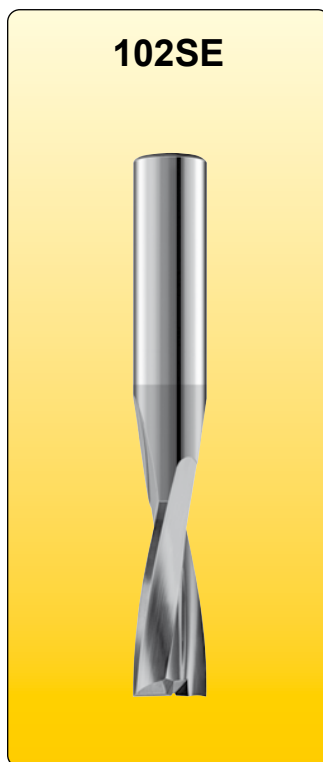

**102SE**

### Settori d'impiego / Range of application


A: Leghe leggere / Light alloys

A1.1-1.2


B: Plastiche - Plastiche rinforzate con fibre

B: *Plastics - Reinforced plastic fibres*

B1.1-1.5 B2.1-2.4

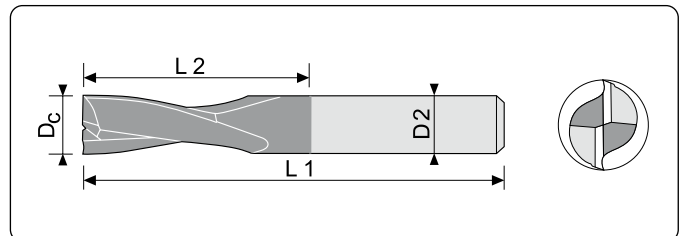

2.  
04



D <sub>c</sub> h10	L2	L1	D2 h6	102S	102SE
					Rivestite / Coated
2	5	57	6	102S.020060557	102S.020060557E
3	10	57	6	102S.030061057	102S.030061057E
4	13	57	6	102S.040061357	102S.040061357E
5	15	57	6	102S.050061557	102S.050061557E
6	18	57	6	102S.060061857	102S.060061857E
7	20	63	8	102S.070082063	102S.070082063E
8	20	63	8	102S.080082063	102S.080082063E
9	22	72	10	102S.090102272	102S.090102272E
10	25	72	10	102S.100102572	102S.100102572E
12	30	83	12	102S.120123083	102S.120123083E