


Frese Z=2 - elica sinistra, taglio destro - norma interna

Linea "ULTRA Ra" con gole lappate

End mills - Z=2 Left hand spiral - Right hand cut - Internal standard

"ULTRA Ra" Speed Line with fine lapped chip flutes

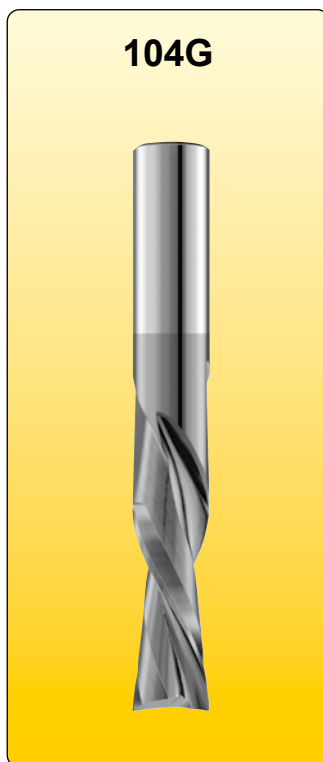

Settori d'impiego / Range of application

A: Leghe leggere / Light alloys

A1.1-1.7 A2.1-2.7 A3.1-3.2 A4.1-4.2



B: Plastiche

B: Plastics

B1.1-1.3 B1.5-1.6 B2.1-2.4

E: Titanio / Titanium

E1.1

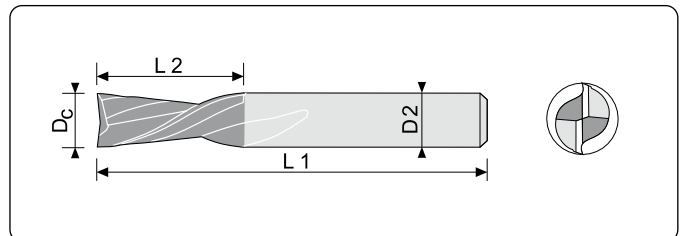

2.
05

D _c h10	L2	L1	D2 h6	104	104G
					Rivestite / Coated
2	6	50	6	104.020060650	104.020060650G
3	12	40	3	104.030031240	104.030031240G
3	9	50	6	104.030060950	104.030060950G
3	12	50	6	104.030061250	104.030061250G
4	14	40	4	104.040041440	104.040041440G
4	13	50	6	104.040061350	104.040061350G
5	16	50	5	104.050051650	104.050051650G
6	18	50	6	104.060061850	104.060061850G
8	20	63	8	104.080082063	104.080082063G
10	25	72	10	104.100102572	104.100102572G
12	30	83	12	104.120123083	104.120123083G
16	35	92	16	104.160163592	104.160163592G
20	45	104	20	104.2002045104	104.2002045104G