
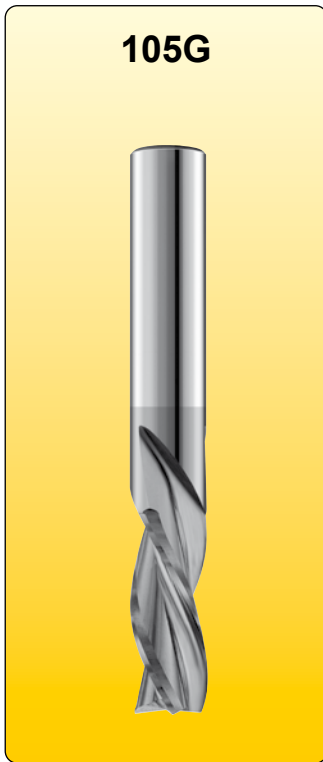


Frese Z=3 elica 30° - elica sinistra, taglio destro - norma interna

Linea "ULTRA Ra" con gole lappate

End mills - Z=3 Helix 30° - Left hand spiral - Right hand cut - Internal standard

"ULTRA Ra" Speed Line with fine lapped chip flutes

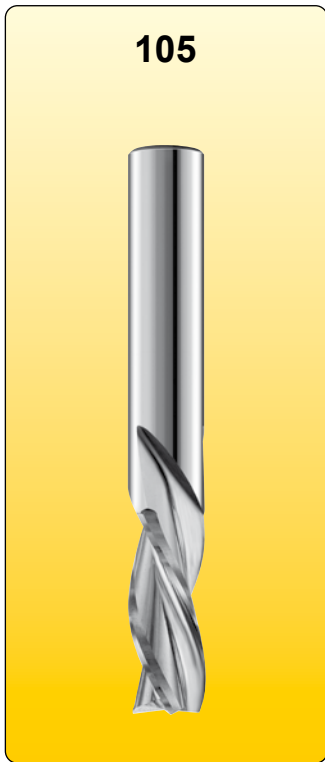

Settori d'impiego / Range of application

A: Leghe leggere / Light alloys

A1.1-1.7 A2.1-2.7 A3.1-3.2 A4.1-4.2



B: Plastiche - Plastiche rinforzate con fibre

B: Plastics - Reinforced plastic fibres

B1.1-1.3 B1.5-1.6 B2.1-2.4

Titanio / Titanium

E1.1

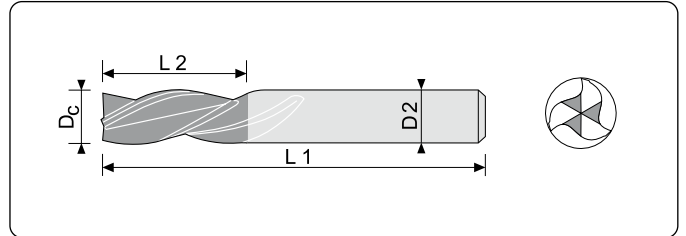

2.05

D _c h10	L2	L1	D2 h6	105	105G
					Rivestite / Coated
3	12	40	3	105.030031240	105.030031240G
4	14	40	4	105.040041440	105.040041440G
5	16	50	5	105.050051650	105.050051650G
6	18	50	6	105.060061850	105.060061850G
8	20	63	8	105.080082063	105.080082063G
10	25	72	10	105.100102572	105.100102572G
12	30	83	12	105.120123083	105.120123083G
16	35	92	16	105.160163592	105.160163592G
20	45	104	20	105.2002045104	105.2002045104G