



## Frese a testa raggiata - Z=2 elica 30° - norma interna - per acciai temprati Ball nose cutters - Z=2 Helix 30° - Internal standard - for hardened steels

2.  
02

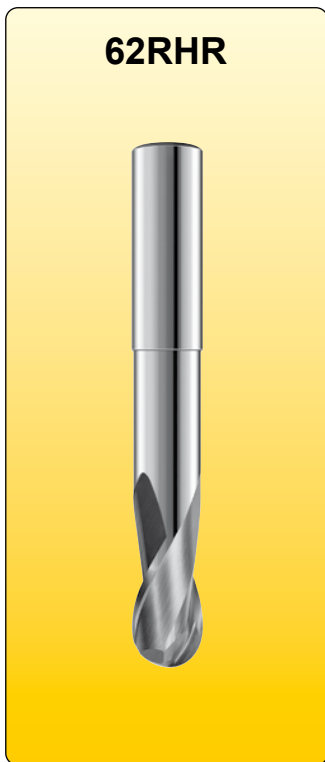



**62RHR**

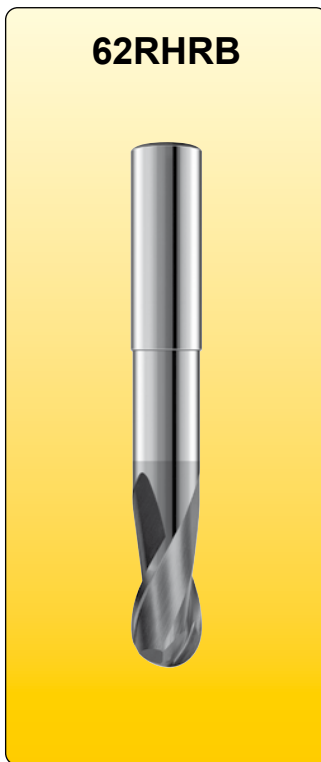

**62RHRB**

Settori d'impiego / Range of application

C:Acciai / Steels  
C3.2-3.5

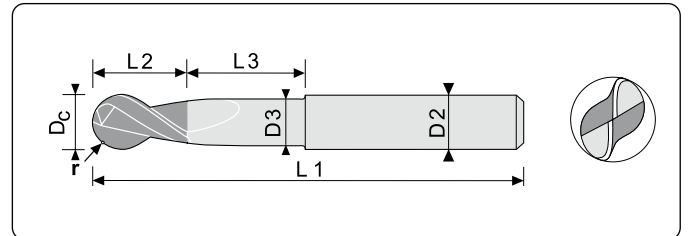

D <sub>c</sub> h10	L2	L1	D2 h6	D3	L3	r	62RHR	62RHRB
							■	Rivestite / Coated
2	5	50	4	1,9	3	1	62RHR.020040550	62RHR.020040550B
3	6	60	6	2,9	6	1,5	62RHR.030060660	62RHR.030060660B
4	7	75	6	3,9	7	2	62RHR.040060775	62RHR.040060775B
5	8	75	6	4,9	8	2,5	62RHR.050060875	62RHR.050060875B
6	12	80	6	5,9	12	3	62RHR.060061280	62RHR.060061280B
8	14	100	8	7,8	15	4	62RHR.0800814100	62RHR.0800814100B
10	18	100	10	9,8	20	5	62RHR.1001018100	62RHR.1001018100B
12	22	105	12	11,8	22	6	62RHR.1201222105	62RHR.1201222105B
14	26	120	14	13,8	25	7	62RHR.1401426120	62RHR.1401426120B
16	30	150	16	15,8	30	8	62RHR.1601630150	62RHR.1601630150B
18	34	150	18	17,7	30	9	62RHR.1801834150	62RHR.1801834150B
20	38	150	20	19,7	30	10	62RHR.2002038150	62RHR.2002038150B

■ previste per rivestimento in proprio - non utilizzabili senza adeguato rivestimento.  
■ provided for own coating. Not suitable without adapted coating.