
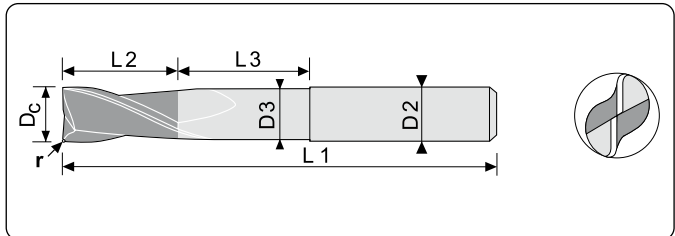
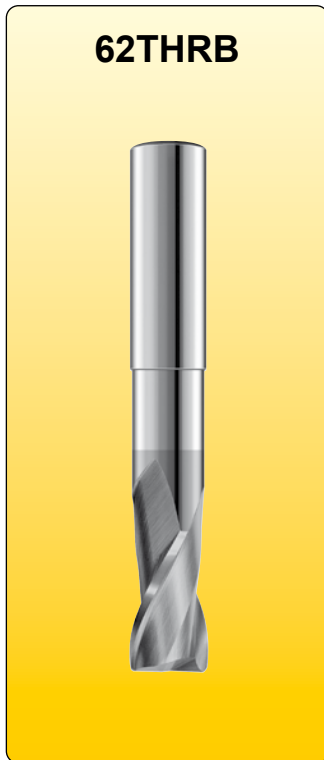


**Frese toriche - Z=2 elica 30° - norma interna - per acciai temprati**  
**Torus cutters - Z=2 Helix 30° - Internal standard - for hardened steels**

Settori d'impiego / Range of application

C: Acciai / Steels  
 C3.2-3.5

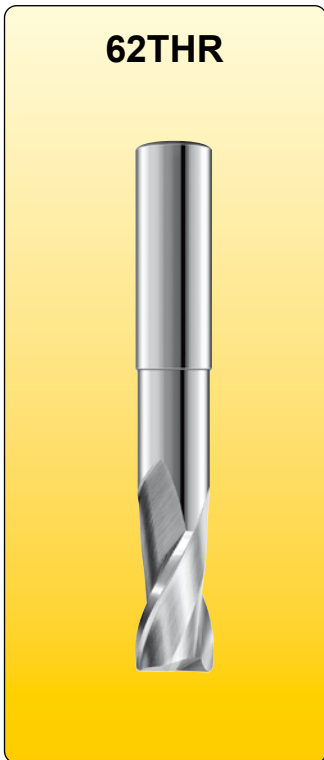

2.  
02

D <sub>c</sub> h10	L2	L1	D2 h6	D3	L3	r	62THR	62THRB
							■	Rivestite / Coated
2	5	50	4	1,9	3	0,4	62THR.020040550	62THR.020040550B
3	6	60	6	2,9	6	0,5	62THR.030060660	62THR.030060660B
4	7	75	6	3,9	7	0,5	62THR.040060775	62THR.040060775B
5	8	75	6	4,9	8	0,5	62THR.050060875	62THR.050060875B
6	12	80	6	5,9	12	0,5	62THR.060061280	62THR.060061280B
8	14	100	8	7,8	15	1	62THR.0800814100	62THR.0800814100B
10	18	100	10	9,8	20	1	62THR.1001018100	62THR.1001018100B
12	22	105	12	11,8	22	1	62THR.1201222105	62THR.1201222105B
14	26	120	14	13,8	25	1,5	62THR.1401426120	62THR.1401426120B
16	30	150	16	15,8	30	1,5	62THR.1601630150	62THR.1601630150B
18	34	150	18	17,7	30	2	62THR.1801834150	62THR.1801834150B
20	38	150	20	19,7	30	2	62THR.2002038150	62THR.2002038150B

■ previste per rivestimento in proprio - non utilizzabili senza adeguato rivestimento.  
 ■ provided for own coating. Not suitable without adapted coating.