




## Frese Z=4 - elica 30° - norma interna End mills - Z=4 Helix 30° - Internal standard

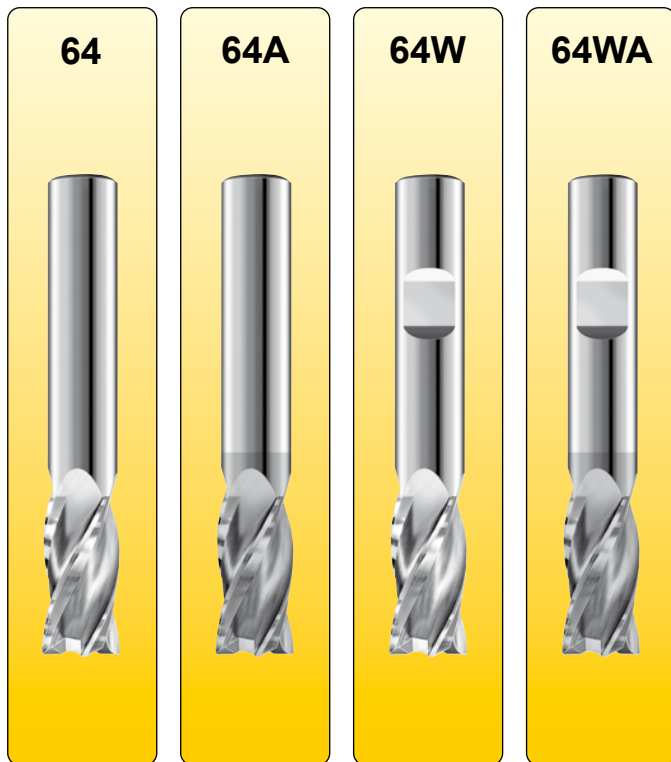

### Settore d'impiego / Range of application

C: Acciai / Steels  
C1.1-1.8 C2.1-2.4 C3.1-3.2 C4.1-4.2

F: Ghise / Cast irons  
F1.1-1.5 F2.1-2.4

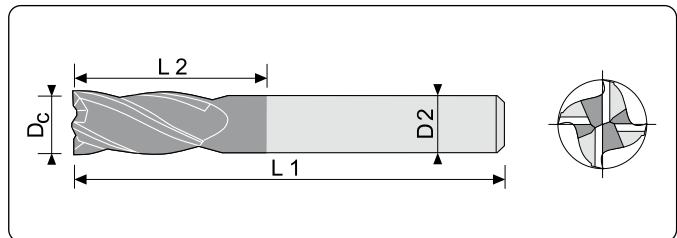

D <sub>c</sub> h10	L2	L1	D2 h6	64	64A	64W	64WA
					Beschichtet/Coated		Rivestite/Coated
2	6	40	2	64.020020640	64.020020640A		
2	4	50	6	64.020060450	64.020060450A		
2,5	7	40	2,5	64.025250740	64.025250740A		
3	8	57	6	64.030060857	64.030060857A	64W.030060857	64W.030060857A
3	10	40	3	64.030031040	64.030031040A		
3,5	10	40	3,5	64.035351040	64.035351040A		
4	11	40	4	64.040041140	64.040041140A		
4	11	57	6	64.040061157	64.040061157A	64W.040061157	64W.040061157A
4,5	11	50	4,5	64.045451150	64.045451150A		
5	13	50	5	64.050051350	64.050051350A		
5,5	13	50	5,5	64.055551350	64.055551350A		
6	13	57	6	64.060061357	64.060061357A	64W.060061357	64W.060061357A
6	16	50	6	64.060061650	64.060061650A		
6,5	16	50	6,5	64.065651650	64.065651650A		
7	16	60	7	64.070071660	64.070071660A		
8	19	63	8	64.080081963	64.080081963A	64W.080081963	64W.080081963A
9	19	63	9	64.090091963	64.090091963A		
10	22	72	10	64.100102272	64.100102272A	64W.100102272	64W.100102272A
11	22	72	11	64.110112272	64.110112272A		
12	26	83	12	64.120122683	64.120122683A	64W.120122683	64W.120122683A
13	26	83	13	64.130132683	64.130132683A		
14	26	83	14	64.140142683	64.140142683A	64W.140142683	64W.140142683A
15	26	92	15	64.150152692	64.150152692A		
16	32	92	16	64.160163292	64.160163292A	64W.160163292	64W.160163292A
18	32	92	18	64.180183292	64.180183292A	64W.180183292	64W.180183292A
20	38	104	20	64.2002038104	64.2002038104A	64W.2002038104	64W.2002038104A
25	45	120	25	64.2502545120	64.2502545120A	64W.2502545120	64W.2502545120A