
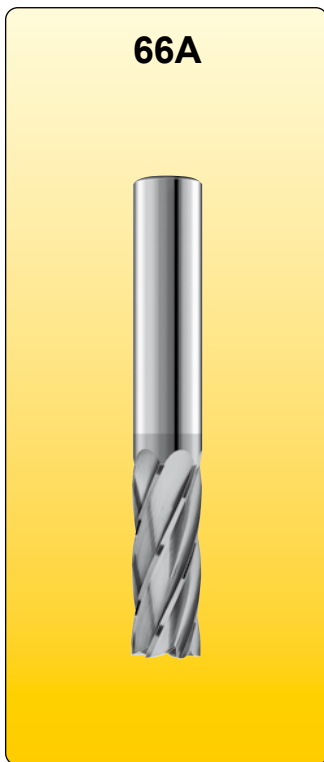


Frese Z=6 - elica 25° - norma interna
End mills - Z=6 - Helix 25° - Internal standard

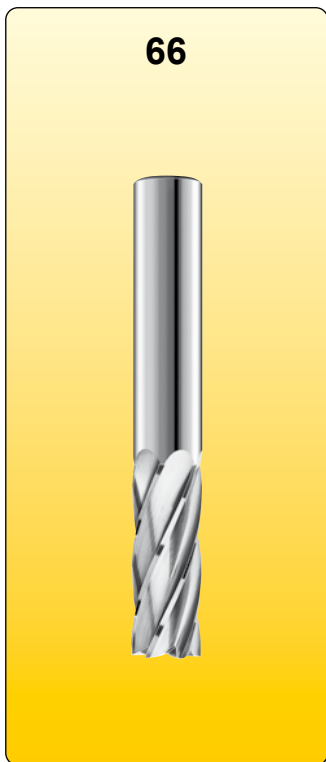



Settore d'impiego / Range of application

C: Acciai / Steels
 C1.3-1.8 C2.1-2.4 C3.1-3.2 C4.1-4.2

D: Acciai inossidabili / Stainless Steel
 D1.1-1.5

E: Titanio / Titanium
 E2.1 E2.3

F: Ghisa / Cast irons
 F1.1-1.5 F2.1-2.4

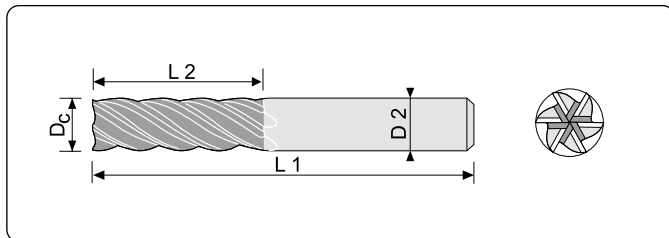

D _c h10	L2	L1	D2 h6	Z	66	66A
					■	Rivestite / Coated
3	12	40	3	6	66.030	66.030A
4	14	40	4	6	66.040	66.040A
5	18	50	5	6	66.050	66.050A
6	18	50	6	6	66.060	66.060A
7	22	60	7	6	66.070	66.070A
8	25	63	8	6	66.080	66.080A
9	25	63	9	6	66.090	66.090A
10	30	72	10	6	66.100	66.100A
11	30	72	11	6	66.110	66.110A
12	32	83	12	6	66.120	66.120A
14	32	83	14	6	66.140	66.140A
16	36	92	16	6	66.160	66.160A
18	40	92	18	6	66.180	66.180A
20	45	104	20	6	66.200	66.200A