
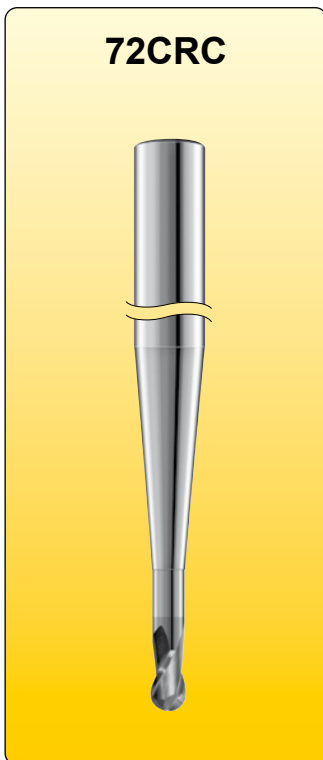


## Frese di copiatura a testa raggiata - Z=2 elica 30° - norma interna Ball nose copy cutters - Z=2 Helix 30° - Internal standard

2.  
02

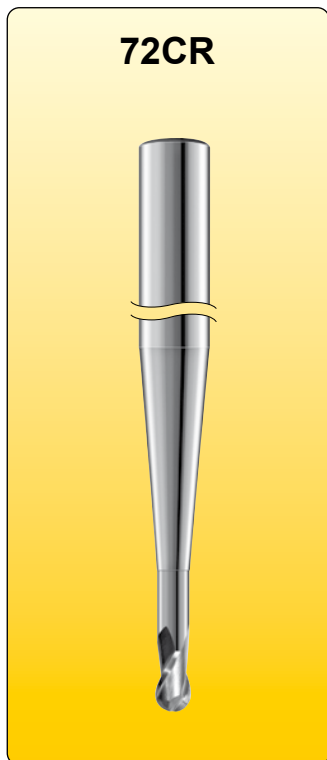

### Settori d'impiego / Range of application



A: Leghe leggere / Light alloys  
A1.7 A2.7 A3.1-3.2

C: Acciai / Steels  
C1.1-1.8 C2.1-2.4 C3.1-3.2 C4.1-4.2

D: Acciaio inossidabile / Stainless steel  
D1.1-1.5

E: Titanio / Titanium  
E1.2-1.3 E2.1-2.3

F: Ghisa / Cast irons  
F1.1-1.5 F2.1-2.4

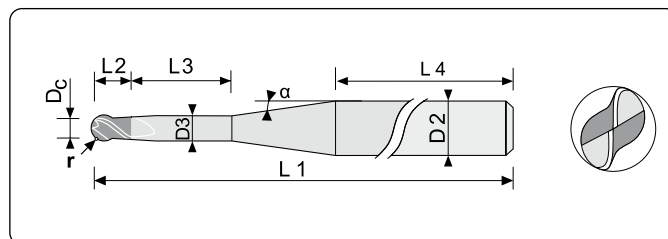

D <sub>c</sub> h10	L2	L1	D2	L3	D3	L4	r	α	72CR	72CRC
										Rivestite / Coated
1	2	50	4	2	0,9	30	0,5	5,53°	72CR.010040250	72CR.010040250C
1	2	57	6	2	0,9	30	0,5	6,33°	72CR.010060257	72CR.010060257C
1,5	2,5	50	4	2,5	1,4	30	0,75	4,95°	72CR.015042550	72CR.015042550C
1,5	2,5	57	6	2,5	1,4	30	0,75	5,98°	72CR.015062557	72CR.015062557C
2	3	50	4	3	1,9	30	1	4,29°	72CR.020040350	72CR.020040350C
2	3	57	6	3	1,9	30	1	5,58°	72CR.020060357	72CR.020060357C
2,5	3,5	50	4	3,5	2,4	30	1,25	3,52°	72CR.025043550	72CR.025043550C
2,5	3,5	57	6	3,5	2,4	30	1,25	5,14°	72CR.025063557	72CR.025063557C
3	3,5	50	4	3,5	2,8	30	1,5	2,42°	72CR.030043550	72CR.030043550C
3	4	80	6	4	2,8	40	1,5	2,86°	72CR.030060480	72CR.030060480C
4	5	57	6	6	3,8	30	0,5	3,93°	72CR.040060557	72CR.040060557C
4	6	80	6	6	3,8	40	2	2,25°	72CR.040060680	72CR.040060680C
5	7	57	6	7	4,8	30	0,5	2,64°	72CR.050060757	72CR.050060757C
5	7	80	6	7	4,8	40	2,5	1,32°	72CR.050060780	72CR.050060780C
6	9	100	8	9	5,8	40	3	1,50°	72CR.0600809100	72CR.0600809100C
6	10	120	10	9	5,8	50	3	2,31°	72CR.0601010120	72CR.0601010120C
8	12	120	10	12	7,8	50	4	1,37°	72CR.0801012120	72CR.0801012120C
8	12	150	12	12	7,8	60	4	1,82°	72CR.0801212150	72CR.0801212150C
10	14	150	12	14	9,8	60	5	1,02°	72CR.1001214150	72CR.1001214150C
10	14	150	14	14	9,8	60	5	1,94°	72CR.1001414150	72CR.1001414150C
12	16	150	14	16	11,8	60	6	1,09°	72CR.1201416150	72CR.1201416150C
12	16	150	16	16	11,8	60	6	2,07°	72CR.1201616150	72CR.1201616150C
16	20	150	20	20	15,6	60	8	2,41°	72CR.1602020150	72CR.1602020150C