

Frese toriche per grafite - Z=2 elica 30° - norma interna Torus cutters for graphite - Z=2 Helix 30° - Internal standard

2.
03

72GT




72GTD



Settori d'impiego / Range of application

G: Grafite / Graphite
G1.1

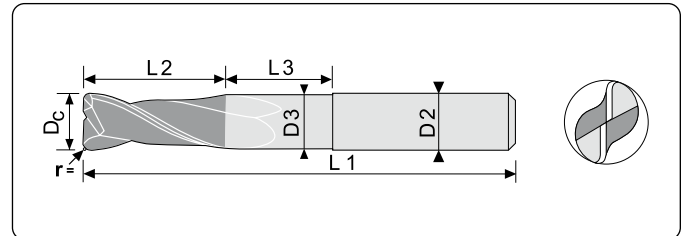

D _c h10	L2	L1	D2 h6	D3	L3	r	72GT	72GTD
							■	Rivestite / Coated
2	6	50	3	1,9	6	0,5	72GT.020030650	72GT.020030650D
2	10	100	3	1,9	10	0,5	72GT.0200310100	72GT.0200310100D
3	8	60	3	2,9	8	0,5	72GT.030030860	72GT.030030860D
3	12	100	3	2,9	12	0,5	72GT.0300312100	72GT.0300312100D
4	10	60	4	3,8	10	0,5	72GT.040041060	72GT.040041060D
4	15	100	4	3,8	15	0,5	72GT.0400415100	72GT.0400415100D
5	12	60	5	4,8	12	0,5	72GT.050051260	72GT.050051260D
5	15	100	5	4,8	15	0,5	72GT.0500515100	72GT.0500515100D
6	20	75	6	5,8	20	0,5	72GT.060062075	72GT.060062075D
6	25	100	6	5,8	25	0,5	72GT.0600625100	72GT.0600625100D
6	30	150	6	5,8	30	0,5	72GT.0600630150	72GT.0600630150D
8	20	75	8	7,8	20	1	72GT.080082075	72GT.080082075D
8	25	100	8	7,8	25	1	72GT.0800825100	72GT.0800825100D
8	30	150	8	7,8	30	1	72GT.0800830150	72GT.0800830150D
10	25	100	10	9,8	25	1	72GT.1001025100	72GT.1001025100D
10	30	150	10	9,8	30	1	72GT.1001030150	72GT.1001030150D
12	25	100	12	11,8	25	1	72GT.1201225100	72GT.1201225100D
12	40	150	12	11,8	40	1	72GT.1201240150	72GT.1201240150D
16	25	100	16	15,8	25	1,5	72GT.1601625100	72GT.1601625100D
16	40	150	16	15,8	40	1,5	72GT.1601640150	72GT.1601640150D

■ Previste per rivestimento in proprio e non utilizzabili senza adeguato rivestimento.
 ■ Provided for own coating only and not applicable without adapted coating.