
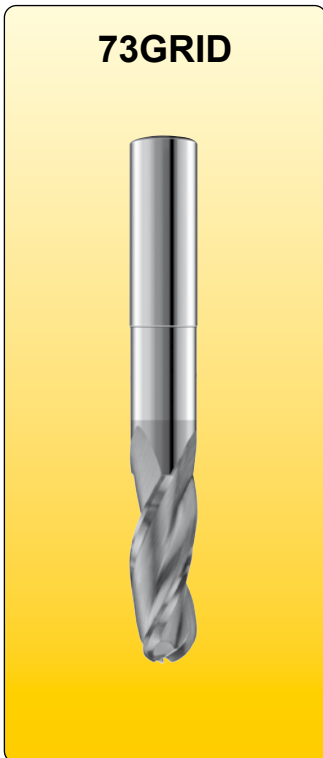



**Frese a testa raggiata per grafite - Z=3 elica 30° - divisione irregolare - norma interna**  
**Radius cutters for graphite - Z=3 Helix 30° univen indexing - Internal Standard**

2.  
03

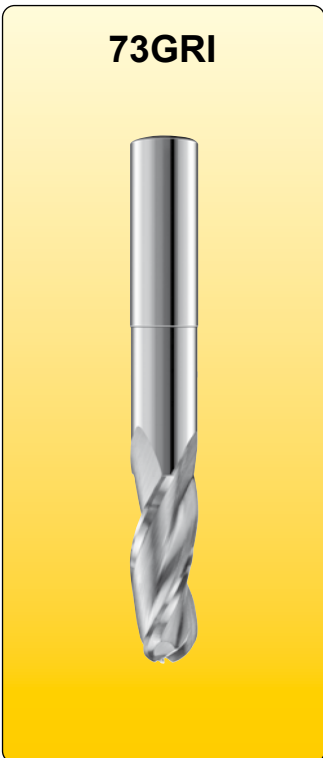

Settori d'impiego / Range of application

G: Grafite / Graphite  
G1.1

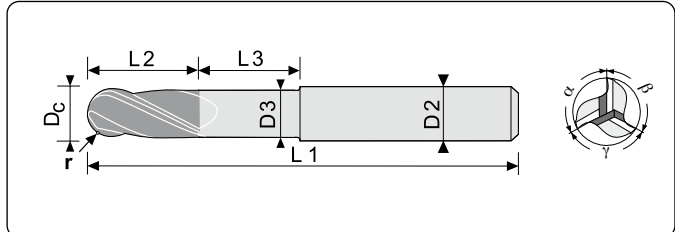

Material and application icons: HM CK20-30-MG Micrograin, WN, HA,  $r =$ , 30° helix angle, 10° chamfer angle, and a crossed-out icon indicating no use with a specific tool.

D <sub>c</sub> h10	L2	L1	D2 h6	D3	L3	r	73GRI	73GRID
							▣	Rivestite / Coated
2	6	50	3	1,9	6	1	73GRI.020030650	73GRI.020030650D
3	8	60	3	2,9	8	1,5	73GRI.030030860	73GRI.030030860D
4	10	60	4	3,8	10	2	73GRI.040041060	73GRI.040041060D
5	12	60	5	4,8	12	2,5	73GRI.050051260	73GRI.050051260D
6	20	75	6	5,8	20	3	73GRI.060062075	73GRI.060062075D
8	20	75	8	7,8	20	4	73GRI.080082075	73GRI.080082075D
10	25	100	10	9,8	25	5	73GRI.1001025100	73GRI.1001025100D
12	25	100	12	11,8	25	6	73GRI.1201225100	73GRI.1201225100D
16	25	100	16	15,8	25	8	73GRI.1601625100	73GRI.1601625100D

▣ Previste per rivestimento in proprio e non utilizzabili senza adeguato rivestimento.  
 ▣ Provided for own coating only and not applicable without adapted coating.