
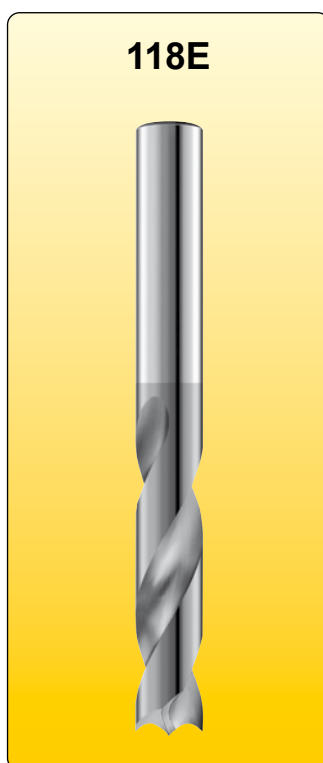




Punte per Kevlar - norma interna
Drills for KEVLAR - Internal standard

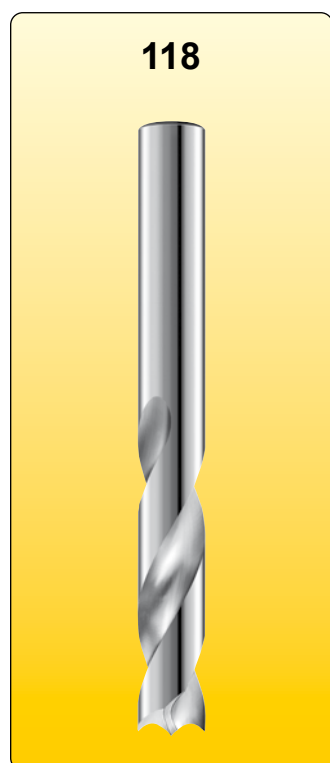

Settori d'impiego / Range of application

A: Leghe Leggere / Light alloys
 A1.1-1.2-1.6 A2.1-2.3-2.5-2.7

B: Plastiche - Plastiche rinforzate con fibre
 B: *Plastics - Reinforced plastic fibres*
 B1.1-1.3 B1.5-1.6

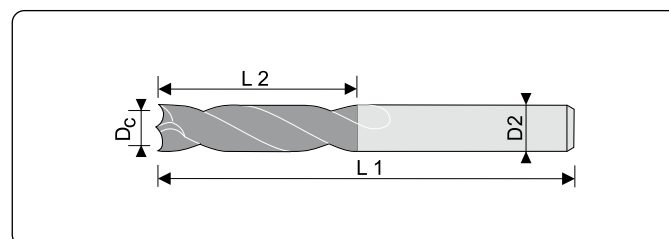

**3.
03**

D _c h6	L2	L1	D2 h6	118	118E
					Rivestite / Coated
3	12	40	3	118.030	118.030E
3,17	12	40	3,17	118.0317	118.0317E
4	18	55	4	118.040	118.040E
5	26	62	5	118.050	118.050E
6	28	66	6	118.060	118.060E
6,35	31	70	6,35	118.0635	118.0635E
6,5	31	70	6,5	118.065	118.065E
7	34	74	7	118.070	118.070E
7,93	37	79	7,93	118.0793	118.0793E
8	37	79	8	118.080	118.080E
8,5	37	79	8,5	118.085	118.085E
9	40	84	9	118.090	118.090E
10	48	89	10	118.100	118.100E
12	50	102	12	118.120	118.120E