




Punte a taglienti diritti - Z=2 - DIN 6539
2 straight flute drills - DIN 6539

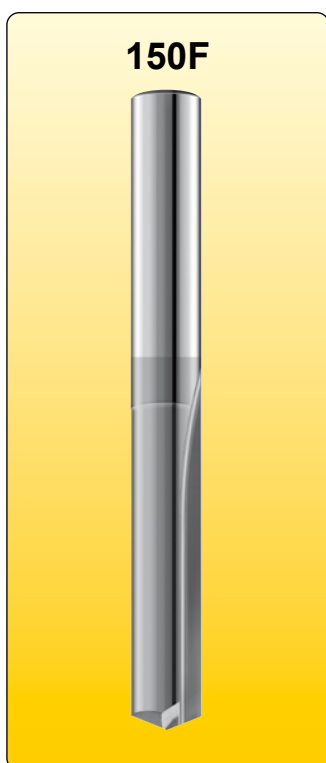

Settori d'impiego / Range of application

C: Acciai / Steels
 C1.6-1.8 C2.1-2.4 C3.1-3.5 C4.1-4.2

F: Ghise / Cast irons
 F1.1-1.5 F2.1-2.4

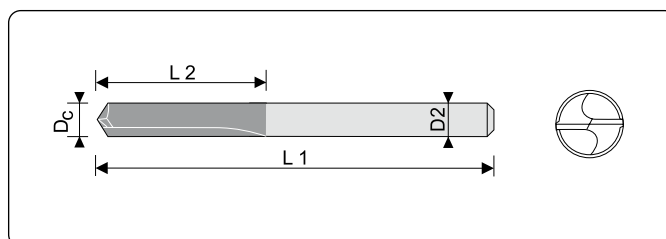

D _c h6	L2	L1	D2 h6	150	150F
					Rivestite / Coated
2	12	38	2	150.020	150.020F
2,5	14	43	2,5	150.025	150.025F
3	16	46	3	150.030	150.030F
3,5	20	52	3,5	150.035	150.035F
4	22	55	4	150.040	150.040F
5	26	62	5	150.050	150.050F
6	28	66	6	150.060	150.060F
7	34	74	7	150.070	150.070F
8	37	79	8	150.080	150.080F
9	40	84	9	150.090	150.090F
10	43	89	10	150.100	150.100F
12	51	102	12	150.120	150.120F
14	54	107	14	150.140	150.140F
16	58	115	16	150.160	150.160F