

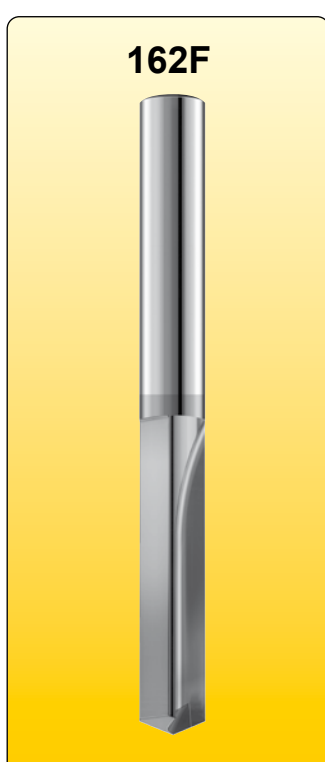


Punte a taglienti diritti - Z=2 - con 4 punti di appoggio - DIN 6539
Star drills straight flute - DIN 6539

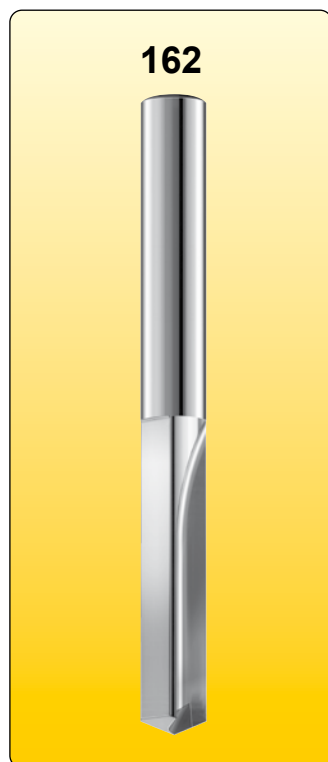

Settori d'impiego / Range of application

- A: Leghe Leggere / Light alloys
A1.3-1.8
- F: Ghise / Cast irons
F1.1-1.5
- E: Titanio / Titanium
E1.1-1.3 E2.1-2.3

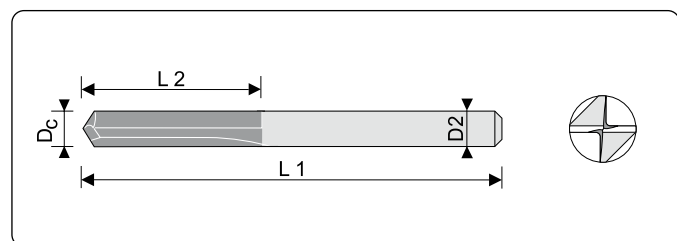

**3.
03**

D _c h6	L2	L1	D2 h6	162	162F
					Rivestite / Coated
2	12	38	2	162.020	162.020F
2,5	14	43	2,5	162.025	162.025F
3	16	46	3	162.030	162.030F
3,5	20	52	3,5	162.035	162.035F
4	22	55	4	162.040	162.040F
4,5	24	58	4,5	162.045	162.045F
5	26	62	5	162.050	162.050F
5,5	28	66	5,5	162.055	162.055F
6	28	66	6	162.060	162.060F
6,5	31	70	6,5	162.065	162.065F
8	37	79	8	162.080	162.080F
8,5	37	79	8,5	162.085	162.085F
9	40	84	9	162.090	162.090F
9,5	40	84	9,5	162.095	162.095F
9,8	43	89	9,8	162.098	162.098F
10	43	89	10	162.100	162.100F
10,5	43	89	10,5	162.105	162.105F
11	47	95	11	162.110	162.110F
11,5	47	95	11,5	162.115	162.115F
12	51	102	12	162.120	162.120F
12,5	51	102	12,5	162.125	162.125F
13	51	102	13	162.130	162.130F
13,5	54	107	13,5	162.135	162.135F

D _c h6	L2	L1	D2 h6	162	162F
					Rivestite / Coated
14	54	107	14	162.140	162.140F
14,5	56	111	14,5	162.145	162.145F
15	56	111	15	162.150	162.150F
15,5	58	115	15,5	162.155	162.155F
16	58	115	16	162.160	162.160F