



Punte a 3 eliche - DIN 6539
3 flute twist drills - DIN 6539

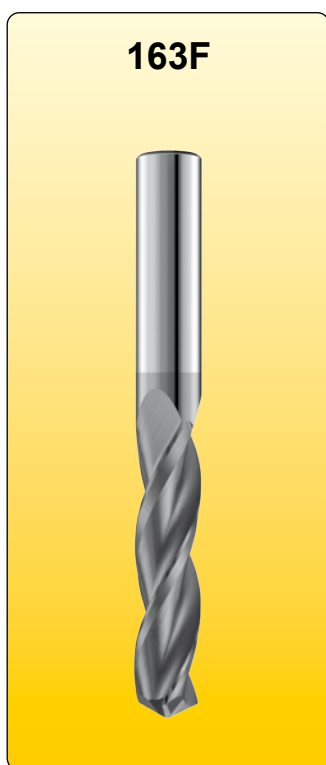


Settori d'impiego / Range of application


- A: Leghe Leggere / Light alloys
A1.1-1.7 A2.1-2.7 A3.1-3.2 A4.1-4.2
- C: Acciai / Steels
C1.1-1.8 C2.1-2.4 C3.1-3.5 C4.1-4.2
- D: Acciai inossidabil / Stainless Steel
D1.2 D1.4
- E: Titanio / Titanium
E1.1-1.3 E2.1-2.3
- F: Ghise / Cast irons
F1.1-1.5 F2.1-2.4

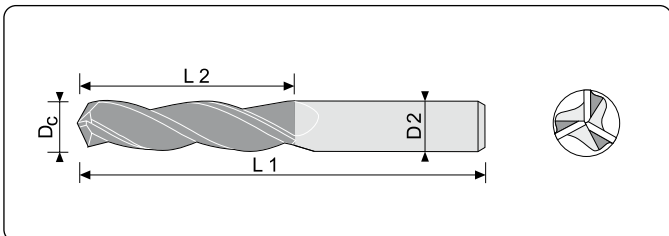



HM
CK20-30-MG
Micrograin


DIN
6539











3.
03

D _c h6	L2	L1	D2 h6	163	163F
					Rivestite / Coated
3	16	46	3	163.030	163.030F
3,5	20	52	3,5	163.035	163.035F
4	22	55	4	163.040	163.040F
4,5	24	58	4,5	163.045	163.045F
5	26	62	5	163.050	163.050F
5,5	28	66	5,5	163.055	163.055F
6	28	66	6	163.060	163.060F
6,5	31	70	6,5	163.065	163.065F
7	34	74	7	163.070	163.070F
7,5	34	74	7,5	163.075	163.075F
8	37	79	8	163.080	163.080F
8,5	37	79	8,5	163.085	163.085F
9	40	84	9	163.090	163.090F
9,5	40	84	9,5	163.095	163.095F
10	43	89	10	163.100	163.100F
10,5	43	89	10,5	163.105	163.105F
11	47	95	11	163.110	163.110F
11,5	47	95	11,5	163.115	163.115F
12	51	102	12	163.120	163.120F
12,5	51	102	12,5	163.125	163.125F
13	51	102	13	163.130	163.130F
13,5	54	107	13,5	163.135	163.135F

D _c h6	L2	L1	D2 h6	163	163F
					Rivestite / Coated
14	54	107	14	163.140	163.140F
14,5	56	111	14,5	163.145	163.145F
15	56	111	15	163.150	163.150F
15,5	58	115	15,5	163.155	163.155F
16	58	115	16	163.160	163.160F
16,5	60	119	16,5	163.165	163.165F
17	60	119	17	163.170	163.170F
17,5	62	123	17,5	163.175	163.175F
18	62	123	18	163.180	163.180F
18,5	64	127	18,5	163.185	163.185F
19	64	127	19	163.190	163.190F
19,5	66	131	19,5	163.195	163.195F
20	66	131	20	163.200	163.200F