
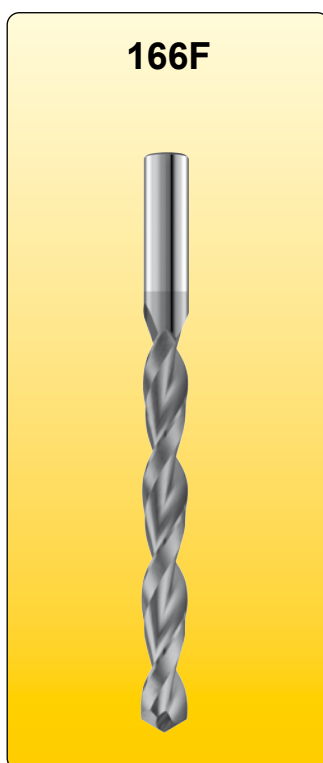


Punte a 2 eliche per leghe leggere - lunga - DIN 338
Twist drills for cast iron and light alloys - long according to DIN 338

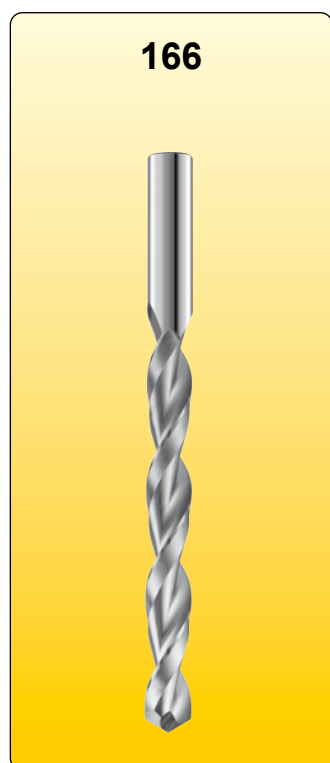

Settori d'impiego / Range of application



A: Leghe Leggere / Light alloys
 A1.1-1.7 A2.1-2.7 A3.1-3.2 A4.1-4.2

B: lastiche - Plastiche rinforzate con fibre
 B: Plastics - Reinforced plastic fibres
 B1.1-1.3 B1.5 B2.1-2.3

C: Acciai / Steels
 C1.1-1.5

E: Titanio / Titanium
 E1.1-1.2 E2.1-2.2

F: Ghise / Cast irons
 F1.1-1.5 F2.1-2.4

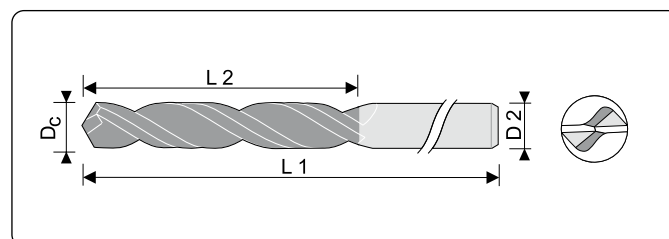

**3.
03**

D _c h6	L2	L1	D2 h6	166	166F
					Rivestite / Coated
2	24	49	2	166.020	166.020F
2,5	30	57	2,5	166.025	166.025F
3	33	61	3	166.030	166.030F
3,5	39	70	3,5	166.035	166.035F
4	43	75	4	166.040	166.040F
4,5	47	80	4,5	166.045	166.045F
5	52	86	5	166.050	166.050F
5,5	57	93	5,5	166.055	166.055F
6	57	93	6	166.060	166.060F
6,5	63	101	6,5	166.065	166.065F
7	69	109	7	166.070	166.070F
7,5	69	109	7,5	166.075	166.075F
8	75	117	8	166.080	166.080F
8,5	75	117	8,5	166.085	166.085F
9	81	125	9	166.090	166.090F
9,5	81	125	9,5	166.095	166.095F
10	87	133	10	166.100	166.100F
10,5	87	133	10,5	166.105	166.105F
11	94	142	11	166.110	166.110F
11,5	94	142	11,5	166.115	166.115F
12	101	151	12	166.120	166.120F
13	101	151	13	166.130	166.130F

D _c h6	L2	L1	D2 h6	166	166F
					Rivestite / Coated
14	108	155	14	166.140	166.140F
14,5	114	169	14,5	166.145	166.145F
15	114	169	15	166.150	166.150F
15,5	120	178	15,5	166.155	166.155F
16	120	178	16	166.160	166.160F