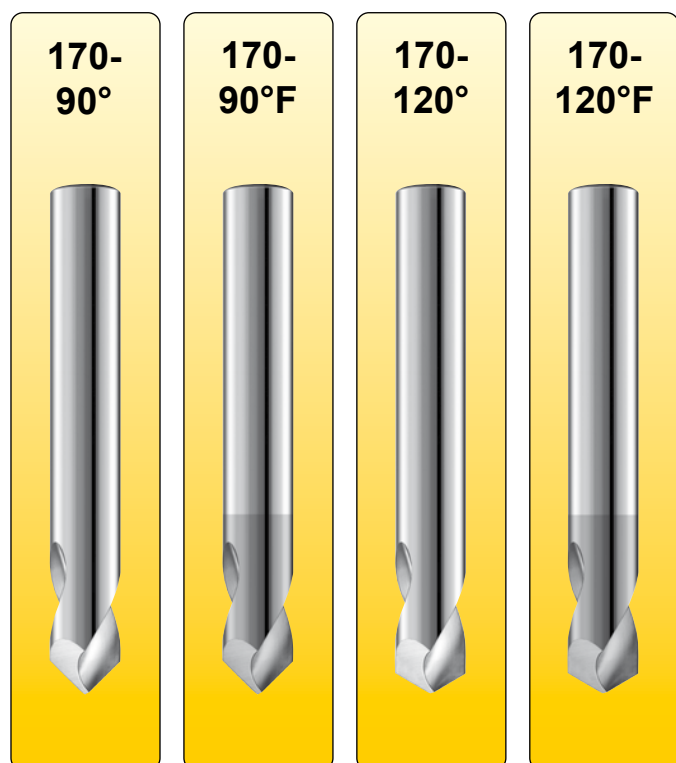


Punte da centro - 90° - 120° - norma interna
90°/120° spotting drills - "N" design - Internal standard

Settori d'impiego / *Range of application*

A: Leghe Leggere / *Light alloys*

A1.1-1.6 A2.1-2.7 A3.1-3.2 A4.1-4.2

C: Acciai / Steels

C1.1-1.8 C2.1-2.4 C3.1 C4.1-4.2

D: Acciai inossidabili / *Stainless Steel*


D1.1-1.5

E: Titanio / *Titanium*


E1.1-1.3 E2.1-2.2

F: Ghise / *Cast irons*

F1.1-1.5 F2.1-2.4

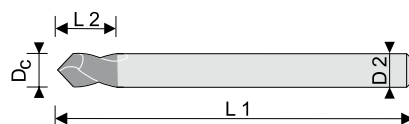

3.01

[illegible]