
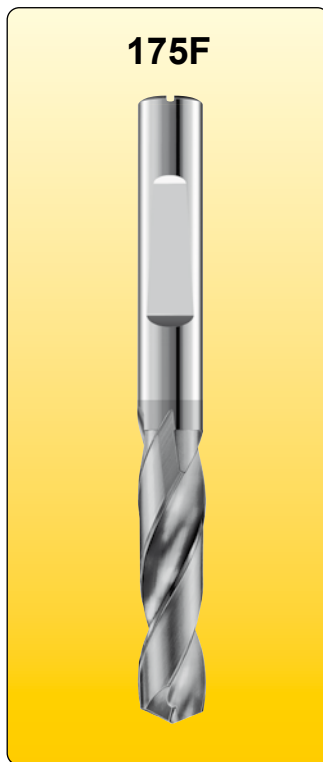


Punte a 2 eliche ad elevato avanzamento con adduzione interna - DIN 6537-K
High performance twist drills with coolant ducts-self centering-short acc. to DIN 6537-K

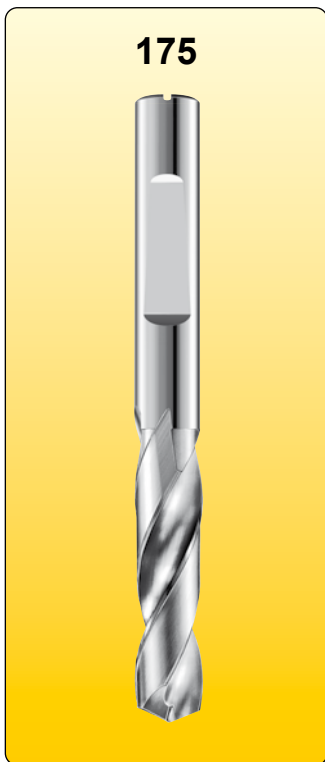

Settori d'impiego / Range of application

A: Leghe Leggere / Light alloys

A1.1-1.7 A2.1-2.7 A3.1-3.2

C: Acciai / Steels

C1.1-1.8 C2.1-2.4 C3.1-3.5 C4.4-4.2

D: Acciai inossidabili/ Stainless Steel


D1.1-1.5.2

E: Titanio / Titanium

E1.1-1.3 E2.1-2.2

F: Ghise / Cast irons

F1.1-1.5 F2.1-2.4

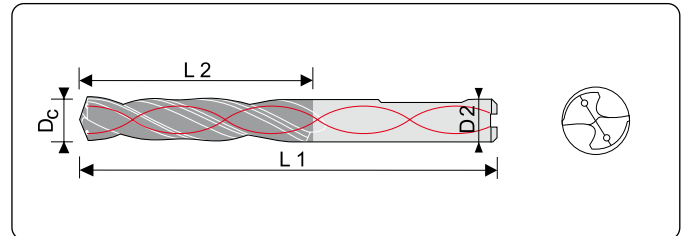

**3.
03**

D _c h6	L2	L1	D2 h6	175	175F
					Rivestite / Coated
5,8	28	66	6	175.058	175.058F
6	28	66	6	175.060	175.060F
6,8	34	79	8	175.068	175.068F
7	34	79	8	175.070	175.070F
7,8	37	79	8	175.078	175.078F
8	37	79	8	175.080	175.080F
8,5	37	89	10	175.085	175.085F
8,8	40	89	10	175.088	175.088F
9	40	89	10	175.090	175.090F
9,5	40	89	10	175.095	175.095F
9,8	43	89	10	175.098	175.098F
10	43	89	10	175.100	175.100F
10,5	43	102	12	175.105	175.105F
10,8	47	102	12	175.108	175.108F
11	47	102	12	175.110	175.110F
11,5	47	102	12	175.115	175.115F
11,8	47	102	12	175.118	175.118F
12	51	102	12	175.120	175.120F
12,5	51	107	14	175.125	175.125F
13	51	107	14	175.130	175.130F
13,5	51	107	14	175.135	175.135F
14	51	107	14	175.140	175.140F

D _c h6	L2	L1	D2 h6	175	175F
					Rivestite / Coated
14,5	56	115	16	175.145	175.145F
15	56	115	16	175.150	175.150F
15,5	58	115	16	175.155	175.155F
16	58	115	16	175.160	175.160F
16,5	60	123	18	175.165	175.165F
17	60	123	18	175.170	175.170F
17,5	62	123	18	175.175	175.175F
18	62	123	18	175.180	175.180F
18,5	64	131	20	175.185	175.185F
19	64	131	20	175.190	175.190F
19,5	66	131	20	175.195	175.195F
20	66	131	20	175.200	175.200F